



**Product name:RP SMA Female/IPEX for RG178,L=250mm**


**Product model: GLC31**

**Electrical specifications**

|                          |                    |
|--------------------------|--------------------|
| Frequency Range(GHz)     | 0-3                |
| Impedance(ohm)           | 50                 |
| Max power (W)            | 50                 |
| VSWR                     | $\leq 1.30+0.002f$ |
| Operating voltage(max)   | 335v               |
| Pressure resistance(rms) | 1000v              |
| Durability               | >500 cycles        |

**Mechanical specifications**

|                     |                           |
|---------------------|---------------------------|
| Connector           | RP SMA Female/IPEX        |
| Length of cable     | RG178 cable 200mm         |
| Color               | Black                     |
| Lighting protection | DC grounding              |
| Ferrule             | Copper with nickel plated |
| Body                | Copper with nickel plated |
| Pin                 | Copper with nickel plated |
| Insulator           | PTFE                      |
| Temperature range   | -65~ +250                 |

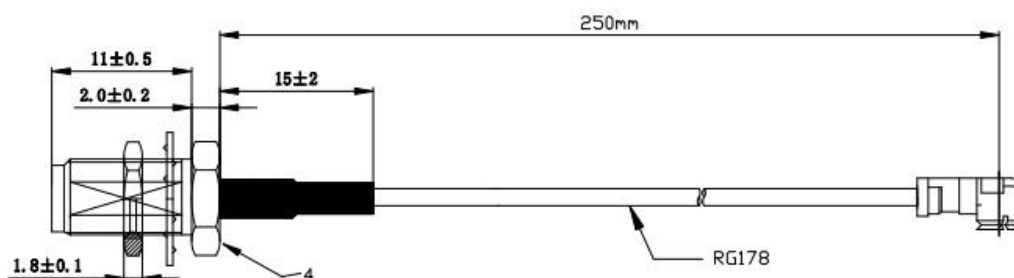

Add: Room826, Floor 8,BLDG 13, University Science Park(East), Zhengzhou City, P.R.Henan, China.  
Tel: 86-371-60911368 Email:info@global-antenna.com  
Web:<http://www.asialeren.com> <http://www.global-antenna.com>